



# FLIR LEPTON<sup>®</sup>

## Longwave Infrared (LWIR) Camera Module

The FLIR Lepton is an LWIR camera solution that is smaller than a dime, can fit inside a cell phone, and is ten times less expensive than a traditional IR camera. Using a focal plane array (FPA) of 80 × 60 active pixel, Lepton easily integrates into native mobile-devices and other electronics as an IR sensor or thermal imager.

### **ENHANCED IR SENSOR**

*Greater sensitivity than common thermopile arrays*

- Thermal sensitivity <50 mK
- Optional temperature-stable output to support radiometric processing
- Low operating power, 150mW
- Low power standby mode

### **MICRO THERMAL IMAGER**

*Uncooled thermal imaging for small electronics*

- Integrated digital thermal image processing
- Multiple lens options: 50° / 25° FOV
- Shutter option available
- Fast time to image (<0.5 seconds)




### **EASE OF INTEGRATION**

*Simplifies development and manufacturing of thermal-enabled devices*

- 8.5 x 8.5 x 5.6 mm package
- Export Compliant (<9Hz)
- MIPI and SPI video interfaces
- Uses standard cell phone-compatible power supplies
- Two-wire serial control interface
- 32-pin socket interface to connector

## Specifications

Overview		LEPTON	
Sensor technology	Uncooled VOx microbolometer		
Spectral range	Longwave infrared, 8 $\mu$ m to 14 $\mu$ m		
Array format	80 $\times$ 60, progressive scan		
Pixel size	17 $\mu$ m		
Effective frame rate	8.6 Hz (exportable)		
Thermal sensitivity	<50 mK (0.050° C)		
Temperature compensation	Automatic. Output image independent of camera temperature.		
Non-uniformity corrections	Shutterless, automatic (with scene motion); also compatible with external shutter		
Image optimization	Factory configured and fully automated		
FOV - horizontal	51°		
FOV - diagonal	63.5°		
Output format	User-selectable 14-bit, 8-bit (AGC applied), or 24-bit RGB (AGC and colorization applied)		
Solar protection	Integral		
Electrical			
Input clock	25-MHz nominal, CMOS IO Voltage Levels		
Video data interface	Video over SPI		
Control port	CCI (I2C-like), CMOS IO Voltage Levels		
Input supply voltage (nominal)	2.8 V, 1.2 V, 2.5 V to 3.1 V IO		
Power dissipation	Nominally 150 mW at room temperature (operating), 4 mW (standby)		
Mechanical			
Package dimensions – socket version	8.5 $\times$ 8.5 $\times$ 5.6 mm (w $\times$ l $\times$ h)		
Weight	0.55 grams (typ)		
Environmental			
Optimum operating temperature range	-10 °C to +65 °C		
Non-operating temperature range	-40 °C to +80 °C		
Shock	1500 G @ 0.4 ms		

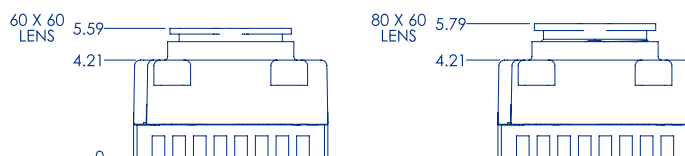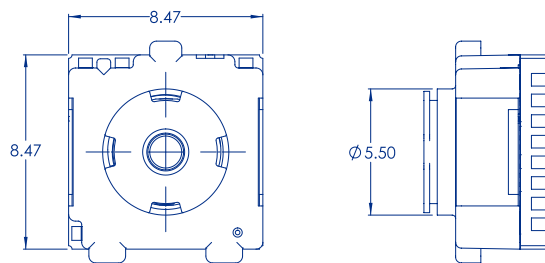

### SANTA BARBARA

FLIR Systems, Inc.  
70 Castilian Drive  
Goleta, CA 93117  
USA  
PH: +1 805.964.9797

### PORTLAND

Corporate Headquarters  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

### EUROPE

FLIR Systems  
Luxemburgstraat 2  
2321 Meer  
Belgium  
PH: +32 (0) 3665 5100

### CHINA – SHANGHAI

FLIR Systems, Co., Ltd.  
K301-302, No.26 Lane  
168, Daduhe Road,  
Putuo District, Shanghai  
200062, P.R.China  
PH: +86-21-5169 7628

www.flir.com  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2014 FLIR Systems, Inc. All rights reserved. [Created 11/21/14]